

magnetic stirrers
NAHITA-BLUE

models 682, 692 and 692/1

magnetic stirrer Nahita-Blue

The new range of Nahita-Blue presents an up-to-date and sturdy design and they make up a series of useful instruments for general applications in the laboratory.



	50692010	50692000	50682000
Control			
Digital	•		
Analogical		•	•
Heating			
With heating	•	•	
Without heating			•
Temperature control			
Solution	•		
Plate		•	-



**models
682 and 692**

features



- Metallic structure, sturdy and very stable.
- Ceramic coated metal stirring plate that assures a better chemical resistance and durability.
- General On/Off switch placed at the back side.
- Accessories included: electrode or thermometer supporting rod and clamp, and stirring magnet.
- Stirring speed up to 1600 rpm and heating temperature up to 380° C (only model 692).
- Models with analogical control are provided with indicating pilots for speed and heat operation.


[1] Ceramic coated metal stirring plate




[2] General On/Off switch placed at the back side



[3] Electrode or thermometer supporting rod and clamp



[4] Stirring speed and temperature adjustment knobs



magnetic stirrer Nahita-Blue

magnetic stirrer Nahita-Blue

models 682 and 692 technical

features



Code	50682000	50692000
Model	682	692
Control	Analogical	Analogical
Max. volume	10 L	
Max. speed	1600 rpm	
Max. temperature	-	380° C
Heating power	-	600 W
Plate dimensions	190x190 mm	
Power	220 V / 50 Hz	
Dimensions (LxAxH)	340x200x120 mm	
Weight	4.5 Kg	

models 682 and 692: equipment parts


■ model 682

1
Accessories included: electrode or thermometer supporting rod and clamp.




■ model 692

1
Accessories included: electrode or thermometer supporting rod and clamp.

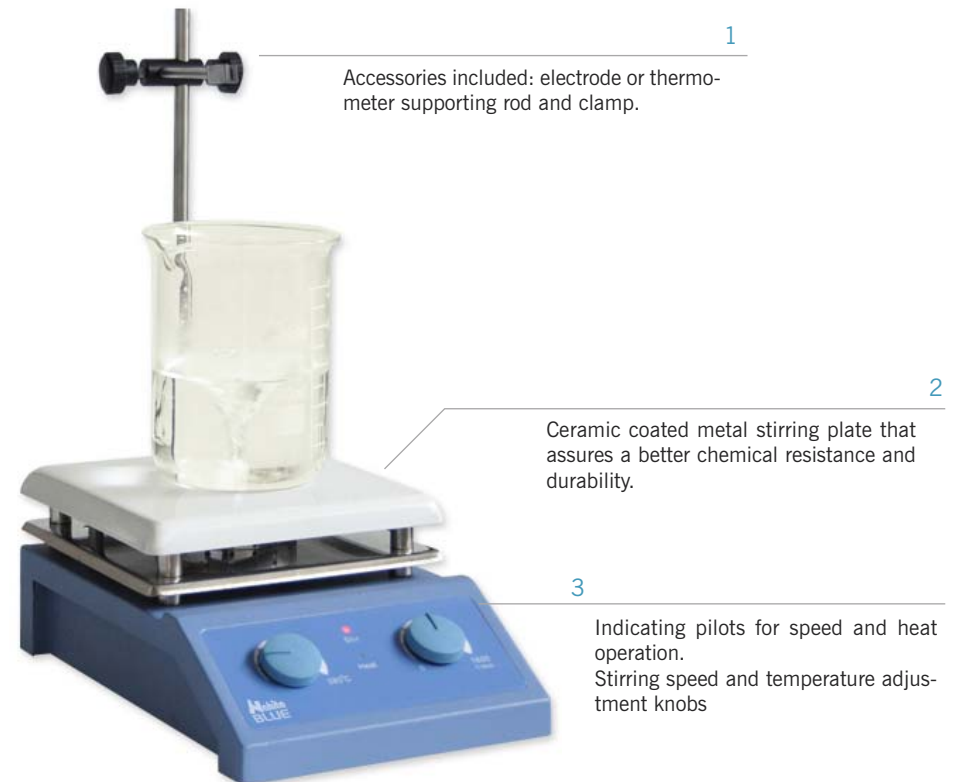

magnetic stirrer Nahita-Blue

model 692/10 features

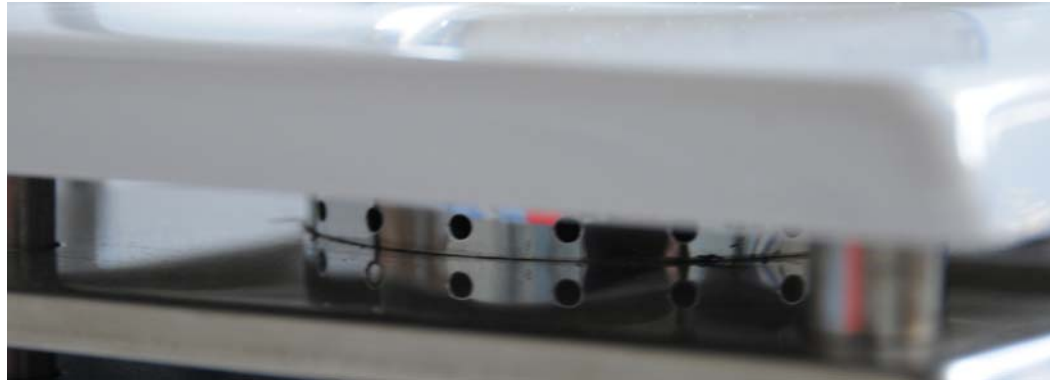


- Metallic structure, sturdy and very stable.
- Ceramic coated metal stirring plate that assures a better chemical resistance and durability.
- General On/Off switch placed at the back side.
- Accessories included: electrode or thermometer supporting rod and clamp, and stirring magnet.
- Stirring speed up to 1600 rpm and heating temperature up to 380° C.
- Microprocessor temperatura digital control
- Easy-to-read back-lit LCD display
- Display of real and programmed temperature and stirring speed.
- Display indicator of heating operation.
- Pt100 external probe for control of solution temperature.
- Hall type revolution control
- Protection against overheating: sound alarm and automatic switch off of heating system in case the temperature is 10° C higher than programmed temperature.

model 692/10
technical
features




Code	50692010
Model	692/1
Control	Digital
Max. volume	10 L
Max. speed	1600 rpm
Max. temperature	380° C
Heating power	600 W
Temp. sensor	Pt100
Plate dimensions	190x190 mm
Power	220 V / 50 Hz
Dimensions (LxWxH)	340x200x120 mm
Weight	4.5 Kg

model 692/10 equipment parts

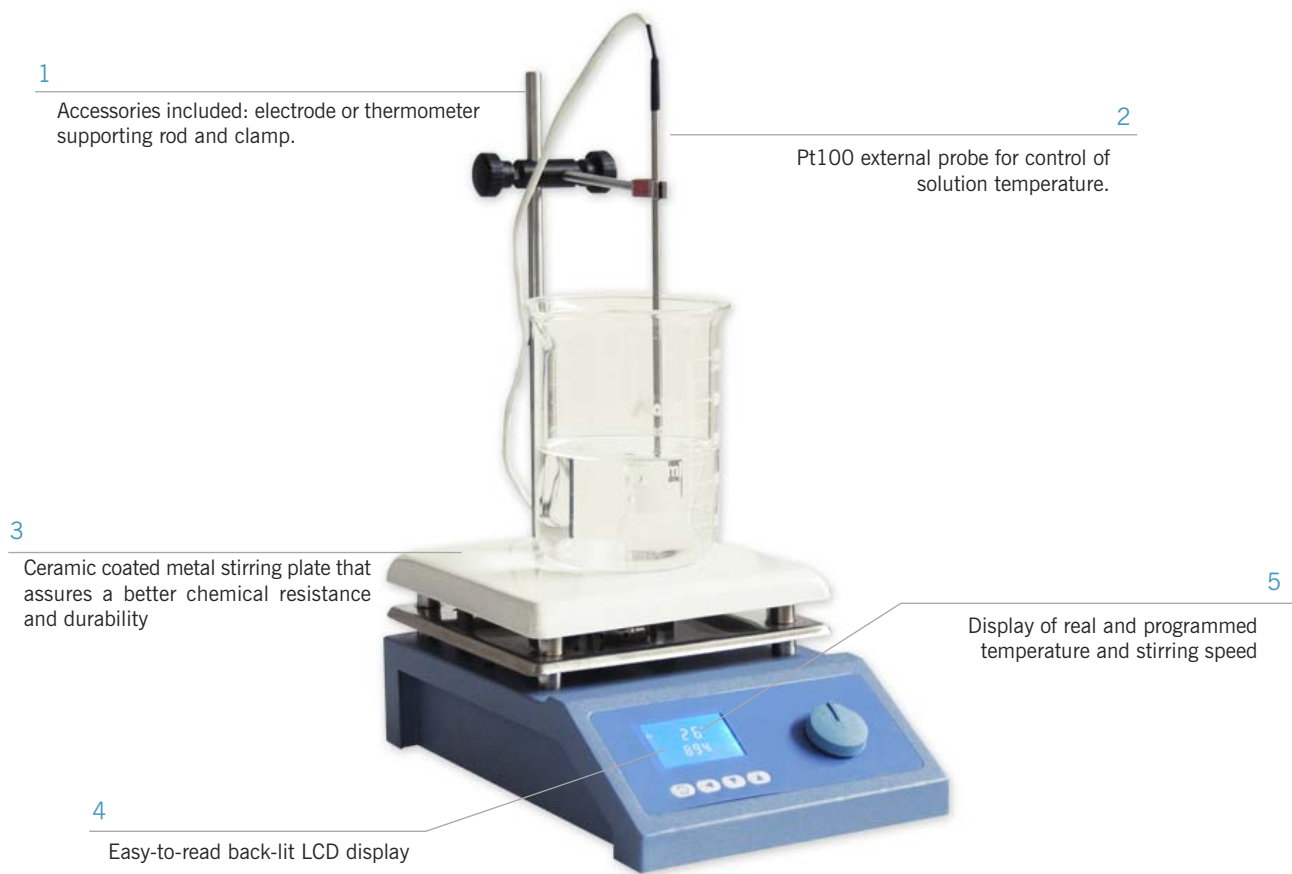

model 692/10 back side

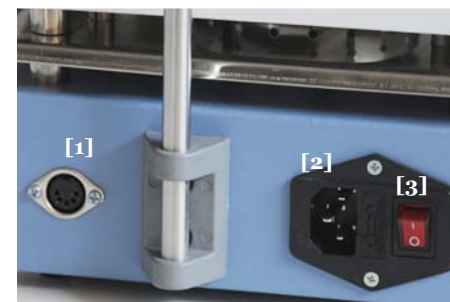

- [1] Plug for temperature probe
- [2] Socket
- [3] General On/Off switch

AUXILAB, S.L.
Polígono Morea Norte Calle D Nº 6
C.P.: 31191 [Berriain] Navarra
T: +34 948 310 513
www.auxilab.es